



Rotary Union 2KA

dimension

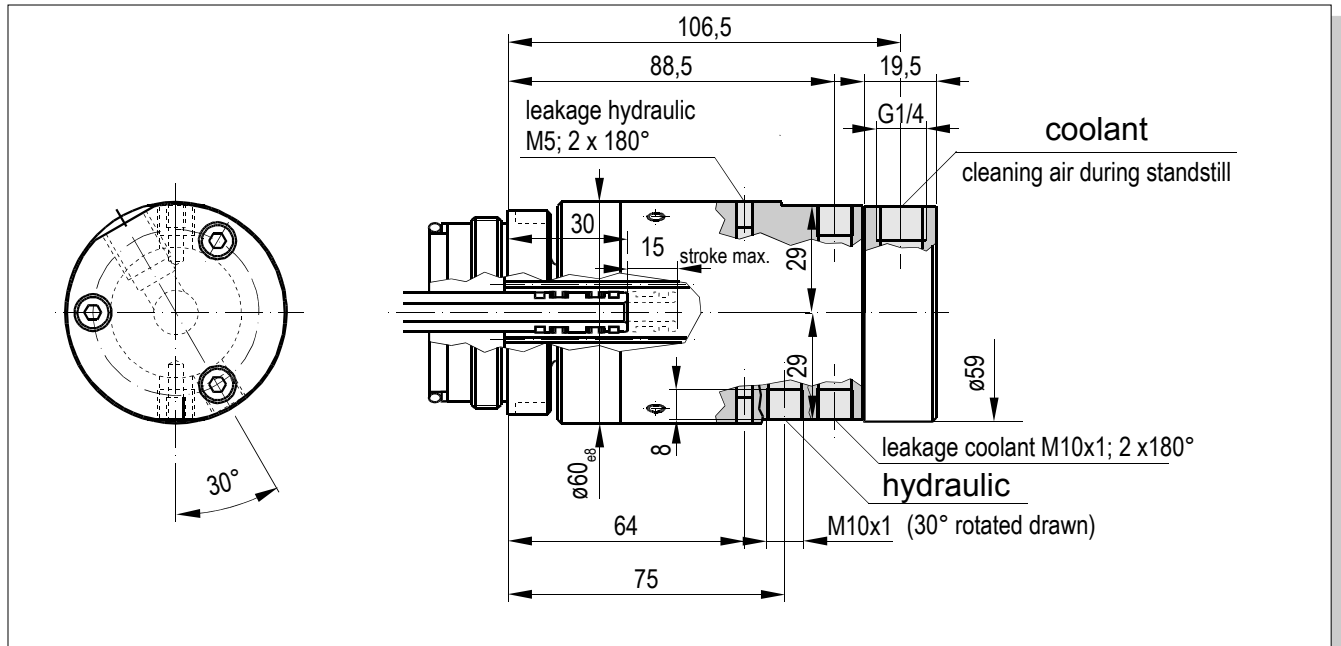

flow volume

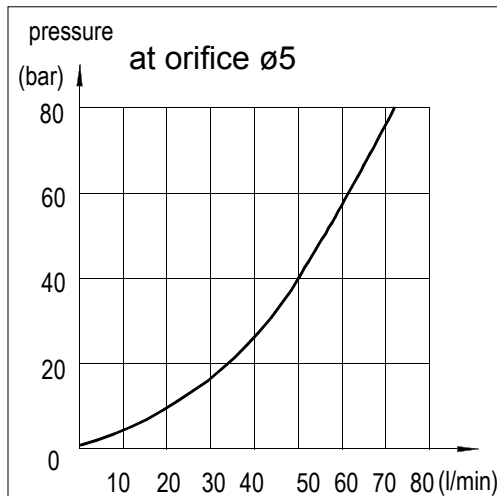

technical data

spindle speed max.	10000	min ⁻¹
coolant pressure max.....	80	bar
hydraulic pressure max.; n = 0 min ⁻¹ ...	160	bar
cleaning air max.; n = 0 min ⁻¹	10	bar
required filtration level per ISO 4406.....	-/16/13	
filter grade.....	< 50	µm

features

- suitable for dry operation
- hydraulic unclamping of power drawbars
- central coolant supply
- cleaning air during tool changing

code

2	5
---	---

Subject to modification due to technical advance!

95.100.234.D.E / 2002-01